


SPECIFICATION

TRANSFORMER FOR DRY TYPE

POWER	KVA
INPUT VOLTAGE	380 V , 400V
OUTPUT VOLTAGE	200 V , 220 V
PHASE	3 phase
INPUT-OUTPUT FREQUENCY	50 Hz
WINDINGS	SOLID COPPER CONDUCTOR (PEW 155 C°)
INSULATION CLASS	Class : F (155 C°)
IMPREGNATION	Insulating Varnish Class : F (155 C°)
DIELECTRIC STRENGTH	3000 V. (4200Vp)
AMBIENT TEMPERATURE	70 C°
TEMPERATURE RISE	95 C° (average)
COOLED	blower
WEIGHT	kg
DIMANSION (WXHXD) CM	75 X 100 X 100

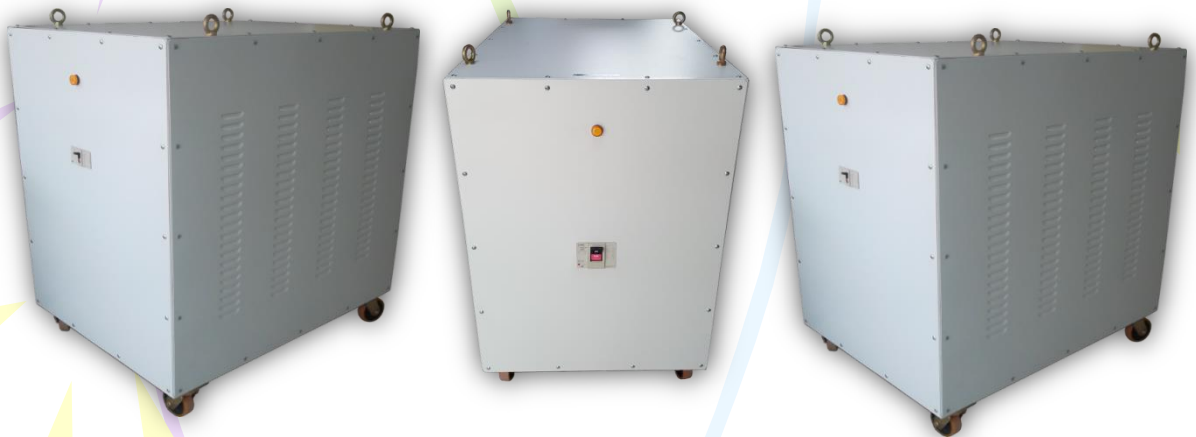

Contact